

Copyright<sup>®</sup> 2017 by Big Bike Parts, Inc. No part of this instruction sheet may be reproduced without the written permission of Big Bike Parts, Inc.

PART NO. 10-106A

H4 LED HEADLIGHT BULB

6/9/2017

FITMENT: UNIVERSAL

**PLEASE READ THROUGH AND UNDERSTAND THESE INSTRUCTIONS BEFORE BEGINNING.**

**ESTIMATED INSTALLATION TIME: 10 TO 15 MIN.**



**1**  
OPEN THE HOOD OF THE VEHICLE AND LOCATE THE HEADLIGHT BULB. YOU MAY NEED TO REFER TO THE VEHICLES OWNERS MANUAL.



**2**  
UNPLUG THE WIRE CONNECTOR AND REMOVE THE DUST BOOT.



**3**  
RELEASE WIRE SPRING CLIP AND REMOVE HEADLIGHT BULB




**4**  
REMOVE THE MOUNTING PLATE FROM THE NEW LED BULB. INSTALL THE PLATE IN THE HOUSING.



**5**  
LOCK SPRING CLIP BACK INTO PLACE.





**6**  
REINSTALL THE DUST BOOT.

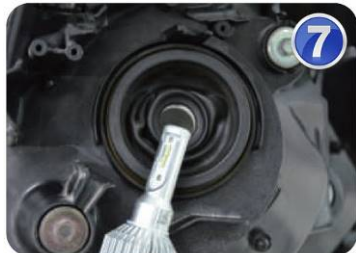

**7**  
INSTALL THE NEW LED BULB THROUGH THE DUST BOOT AND INTO THE MOUNTING PLATE. ROTATE TO LOCK INTO PLACE.



**8**  
CONNECT THE LED CONNECTOR TO THE VEHICLE CONNECTOR. TEST HEADLIGHT TO MAKE SURE IT IS WORKING.

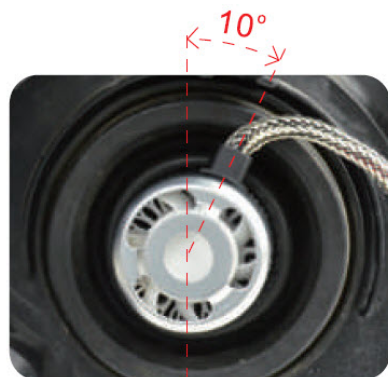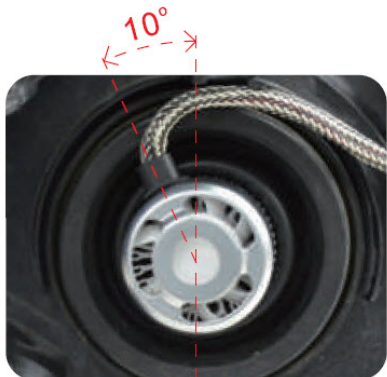

Rotating 10° to the left

Rotating 90° vertically

Rotating 10° to the right

**BY ROTATING THE BULB TO THE LEFT OR RIGHT YOU CAN ADJUST THE HEADLIGHTS BEAM PATTERN**