

Copyright © 2018 by Big Bike Parts, Inc. No part of this instruction sheet may be reproduced without the written permission of Big Bike Parts, Inc.

PART NO. Y60-121BK, Y60-122BK

TUXEDO TIE

2/1/2018

FITMENT: YAMAHA STAR VENTURE/ELUDER 2018-NEWER

TOOLS NEEDED:	4MM ALLEN WRENCH	5MM ALLEN WRENCH	RUBBING ALCOHOL	CLEAN LINT FREE TOWEL	REMOVABLE THREAD LOCK
---------------	------------------	------------------	-----------------	-----------------------	-----------------------

PLEASE READ THROUGH AND UNDERSTAND THESE INSTRUCTIONS BEFORE BEGINNING. USE REMOVABLE THREAD LOCK ON ALL FASTENERS.

ESTIMATED INSTALLATION TIME: 20 TO 30 MIN.

INSTALLATION:

1. REMOVE THE RIGHT SIDE PANEL FROM THE BIKE BY TURNING THE 1/4 TURN FASTENER COUNTER CLOCKWISE AND THEN PULL THE COVER TO REMOVE IT. SEE FIG. 1.
2. REMOVE THE ALLEN SCREW IN THE LEFT SIDE PANEL WITH A 5MM ALLEN WRENCH. THEN PULL THE PANEL OUT TO REMOVE IT. SEE FIG. 2.
3. ON THE RIGHT SIDE UNPLUG THE SEAT CONNECTOR. THE RELEASE FOR THE CONNECTOR IS AT THE END OF THE ARROW IN FIG. 3.
4. USING A 5MM ALLEN WRENCH REMOVE THE BLACK SEAT SCREW SHOWN IN FIG. 3. ALSO REMOVE THE OTHER SEAT SCREW ON THE LEFT SIDE.
5. LIFT UP THE FRONT OF THE SEAT AND PULL IT FORWARD TO REMOVE IT.
6. OPEN THE CONSOLE LID ON THE FUEL TANK. USING A 4MM ALLEN WRENCH REMOVE THE FOUR SCREWS SHOWN IN FIG. 4.
7. REMOVE THE FUEL CAP AND LIFT THE CONSOLE STRAIGHT UP TO REMOVE IT. THE CONSOLE WILL STILL BE CONNECTED TO THE BIKE BY A CABLE. YOU DO NOT NEED TO DISCONNECT THE CABLE.
8. CLEAN THE AREA UNDER THE CONSOLE AND THE REAR OF THE TANK WITH RUBBING ALCOHOL. BE SURE AND CLEAN UNDER THE BACK SIDE NEAR THE SEAT WHERE THE HOOK IS GOING TO BE MOUNTED. SEE FIG. 5 AND 6.
9. REMOVE THE 2" PIECE OF HOOK FROM THE TUX TIE AND INSTALL IT ON THE TANK AS SHOWN IN FIG. 5.
10. ATTACH THE TUX TIE TO THE TANK USING THE HOOK YOU JUST INSTALLED AND THE CENTER PIECE OF LOOP ON THE TUX TIE.
11. REMOVE THE MASKING FROM THE TWO 2-1/2" PIECES OF HOOK STILL ATTACHED TO THE FRONT OF THE TUX TIE AND ATTACH THEM TO THE TANK AS SHOWN IN FIG. 5. PRESS THEM DOWN TIGHTLY TO HELP THE TAPE ADHERE.
12. REMOVE THE MASKING FROM THE TWO 3" PIECES OF HOOK ON THE BACK SIDE OF THE TUX TIE. ONE AT A TIME PULL THE TUX TIE TIGHT AND WRAP THE HOOK AROUND THE END AND UNDER THE TANK. SEE FIG. 6. PRES THEM DOWN TIGHTLY TO HELP ADHERE THE TAPE.
13. MAKE ANY ADJUSTMENT NEED TO TIGHT THE TUX TIE AND THEM REINSTALL THE CONSOLE.
14. REINSTALL THE SEAT AND SIDE PANELS.
15. THERE IS A CORD HOLDER FEATURE ON THE LEFT REAR OF THE TUX TIE. A 3" PIECE OF ONE WRAP IS SUPPLIED WITH THE TUX TIE. SEE FIG. 7. *NOTE: IF YOU DO NOT USE A CORD YOU CAN SIMPLY CUT OFF THE PIECE OF LOOP.*



FIG. 1



FIG. 2



FIG. 3



FIG. 4

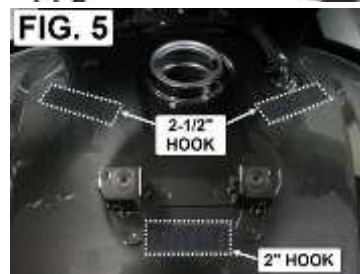


FIG. 5



FIG. 6



FIG. 7